



ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು (ವಿ.)ರವರ ಕಛೇರಿ

OFFICE OF THE EXECUTIVE ENGINEER (Ele.)

EE/AEE(LO)/TA3/2022-23/4793-94/14.12.2022
M/s SULIT METALS & ALLOYS PVT LTD.,

ಪ್ಲಾಟ್ ಸಂಖ್ಯೆ - 19-P2, ಗೌರಿಬಿದನೂರು ಕೈಗಾರಿಕಾ ಪ್ರದೇಶ,

2 ನೇ ಹಂತ, ಕುಡುಮಲಕುಂಟೆ, ಕಸಬಾ ಹೋಬಳಿ,

ಗೌರಿಬಿದನೂರು ತಾಲ್ಲೂಕು.

A/C ID : 5018851

ಮಾನ್ಯರೇ,

ವಿಷಯ: ಗೌರಿಬಿದನೂರು ತಾಲ್ಲೂಕು, ಕಸಬಾ ಹೋಬಳಿ, ಕುಡುಮಲಕುಂಟೆ ಗ್ರಾಮದ ಕೈಗಾರಿಕಾ ಪ್ರದೇಶದ ಪ್ಲಾಟ್ ನಂ. 19-P2 ರಲ್ಲಿ ಕೈಗಾರಿಕಾ ಉದ್ದೇಶಕ್ಕಾಗಿ 250 ಕೆವಿಎ ವಿದ್ಯುತ್ ಹೊರೆಯನ್ನು ಹೆಚ್.ಟಿ-2(a) ಜಕಾತಿಯಲ್ಲಿ ವಿದ್ಯುತ್ ಸಂಪರ್ಕವನ್ನು ಮಂಜೂರು ಮಾಡುವ ಬಗ್ಗೆ.

>>>><<<<

ಮೇಲ್ಕಂಡ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ, ನಿಮ್ಮ ಮನವಿಯಲ್ಲಿ ನೀಡಿದ ಕೋರಿಕೆಯಂತೆ ಗೌರಿಬಿದನೂರು ತಾಲ್ಲೂಕು, ಕಸಬಾ ಹೋಬಳಿ, ಕುಡುಮಲಕುಂಟೆ ಗ್ರಾಮದ ಕೈಗಾರಿಕಾ ಪ್ರದೇಶದ ಪ್ಲಾಟ್ ನಂ. 19-P2 ರಲ್ಲಿ ಕೈಗಾರಿಕಾ ಉದ್ದೇಶಕ್ಕಾಗಿ 250 ಕೆವಿಎ ವಿದ್ಯುತ್ ಹೊರೆಯನ್ನು ಹೆಚ್.ಟಿ-2(a) ಜಕಾತಿಯಲ್ಲಿ ವಿದ್ಯುತ್ ಸಂಪರ್ಕವನ್ನು ಈ ಕೆಳಗೆ ಸೂಚಿಸಿರುವ ಷರತ್ತುಗಳ ಮೇರೆಗೆ ಮಂಜೂರು ಮಾಡಲಾಗಿದೆ.

1. ನಿಮ್ಮ ಸ್ಥಾವರಕ್ಕೆ ವಿದ್ಯುತ್ ಸರಬರಾಜನ್ನು 11ಕೆ.ಎ ವರ್ಗದಲ್ಲಿ ನೀಡಲಾಗುವುದು.
2. ವಿದ್ಯುತ್ ಮಂಜೂರಾತಿಯು ಈ ದಿನಾಂಕದಿಂದ 90 ದಿವಸಗಳವರೆಗೆ ಚಾಲ್ತಿಯಲ್ಲಿರುತ್ತದೆ.
3. ನಿಮ್ಮ ಸ್ಥಾವರದ ಜಕಾತಿಯು ಹೆಚ್.ಟಿ-2(a) ಆಗಿರುತ್ತದೆ. (ಜಕಾತಿ ಆದೇಶದನ್ವಯ ಸೂಕ್ತ ಜಕಾತಿ ಅನ್ವಯವಾಗುತ್ತದೆ).
4. ಈ ಕೆಳಕಂಡ ಮೊತ್ತವನ್ನು ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಇಂಜಿನಿಯರ್, ಬೆಂಗಳೂರು ಗೌರಿಬಿದನೂರು ಉಪ ವಿಭಾಗ ರವರ ಹೆಸರಿನಲ್ಲಿ ಡಿಡಿ ಮುಖಾಂತರ ಈ ಪತ್ರದ ದಿನಾಂಕದಿಂದ 90 ದಿನಗಳೊಳಗಾಗಿ ಪಾವತಿಸಬೇಕು ಹಾಗೂ ವಿದ್ಯುತ್ ಪರಿವೀಕ್ಷಕರ ಶುಲ್ಕವನ್ನು ಉಪ ವಿದ್ಯುತ್ ಪರಿವೀಕ್ಷಕರ, ಕರ್ನಾಟಕ ಸರ್ಕಾರ ರವರಿಗೆ ಪಾವತಿಸುವುದು.

ಲೇವಣಿ ವಿವರಗಳು (ಲೆಕ್ಕ ಶೀರ್ಷಿಕೆ)	ಲೇವಣಿಯ ಮೊತ್ತ	ರೂ ಅಕ್ಷರಗಳಲ್ಲಿ
2ತಿಂಗಳ ಕನಿಷ್ಠ ಲೇವಣಿ ಬಾಬು	5,12,500.00	ಐದು ಲಕ್ಷದ ಹನ್ನೆರಡು ಸಾವಿರದ ಐದು ನೂರು ರೂಪಾಯಿಗಳು ಮಾತ್ರ
10% ಮೇಲ್ವಿಚಾರಣಾ ಶುಲ್ಕ	59,200.00	ಐವತ್ತೊಂಬತ್ತು ಸಾವಿರದ ಎರಡು ನೂರು ರೂಪಾಯಿಗಳು ಮಾತ್ರ
ಸಾಮಗ್ರಿಗಳ ತಪಾಸಣಾ ಶುಲ್ಕ	10,000.00	ಹತ್ತು ಸಾವಿರ ರೂಪಾಯಿಗಳು ಮಾತ್ರ
ಸರಕು ಮತ್ತು ಸೇವಾ ತೆರಿಗೆ 18%	12,456.00	ಹನ್ನೆರಡು ಸಾವಿರದ ನಾಲ್ಕು ನೂರ ಐವತ್ತಾರು ರೂಪಾಯಿಗಳು ಮಾತ್ರ
ಒಟ್ಟು		5,94,156.00

5. ಹಣ ಪಾವತಿ ಮಾಡಿರುವ ದೃಢೀಕರಣದ ಪತ್ರವನ್ನು ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಇಂಜಿನಿಯರ್ (ವಿ) ಗೌರಿಬಿದನೂರು ಉಪ ವಿಭಾಗದವರು ಪ್ರಮಾಣೀಕರಿಸಿ, ಆಡಳಿತ ಅನುಮೋದನೆ ನೀಡಲು ಈ ಕಛೇರಿಗೆ ಕಳುಹಿಸಿ ಕೊಡಬೇಕು.
6. ನಿಮ್ಮ ಕಟ್ಟಡಕ್ಕೆ ಸಂಬಂಧಪಟ್ಟ ಪ್ರಾಧಿಕಾರದಿಂದ ಅನುಮೋದನೆ ಪಡೆದಿರುವ ದಾಖಲಾತಿಯನ್ನು ಸಲ್ಲಿಸತಕ್ಕದ್ದು, ನಿಮ್ಮ ಕಟ್ಟಡದಲ್ಲಿ ಅಳವಡಿಸಿರುವ ಯಂತ್ರೋಪಕರಣ ಹೆಸರು ಮತ್ತು ಸಾಮರ್ಥ್ಯ ಇತ್ಯಾದಿ ಮಾಹಿತಿ ಸಮಾಪನ ವರದಿ ಮತ್ತು ನಿಮ್ಮ ಕಟ್ಟಡದ ಸಕ್ಷೆಯೊಂದಿಗೆ ಈ ಕಛೇರಿಗೆ ದ್ವಿಪ್ರತಿಯಲ್ಲಿ ಸಲ್ಲಿಸುವುದು.

...2

7. DLMS feature ಇರುವಂತಹ 0.2 ಕ್ಲಾಸ್ ಮಾಪಕವನ್ನು ಮತ್ತು 3 ಸಿ.ಟಿ, 3 ಪಿಟಿ ಗಳಿರುವ ಹೆಚ್.ಟಿ ಮೀಟರಿಂಗ್ ಕ್ಯುಬಿಕಲ್ ಅನ್ನು ಅಳವಡಿಸುವುದು.

8. ಕಾಮಗಾರಿಗಳನ್ನು ಕರ್ನಾಟಕ ರಾಜ್ಯದ ಅನುಮತಿ ಪಡೆದ ಪ್ರಥಮ ದರ್ಜೆ ಗುತ್ತಿಗೆದಾರರ ಮುಖೇನ ಬೆವಿಕಂ ನ ಅಧಿಕಾರಿಗಳ ಮೇಲ್ವಿಚಾರಣೆಯಲ್ಲಿ ನಿರ್ವಹಿಸುವುದು.
9. ಪರಿವರ್ತಕಗಳು, ವಾಹಕಗಳು, ಮೀಟರಿಂಗ್ ಕ್ಯುಬಿಕಲ್, ಭೂಗತ ಕೇಬಲ್ ಮುಂತಾದ ಸಾಮಗ್ರಿಗಳು IE/BESCOM/KPTCL ಮಾನದಂಡಗಳ ಪ್ರಕಾರ ಇರಬೇಕು ಮತ್ತು ಎಲ್ಲಾ ಸಾಮಗ್ರಿಗಳ ಗುಣಮಟ್ಟವನ್ನು ಖರೀದಿ ಮಾಡುವ ಮೊದಲೇ ಸಂಬಂಧಪಟ್ಟ ಕಾರ್ಯನಿರ್ವಾಹಕ ಇಂಜಿನಿಯರ್ ರವರು ಪರಿಶೀಲಿಸಬೇಕು.
10. ಬೆವಿಕಂ ಅನುಮೋದನೆ ಪಡೆದ ಮಾರಾಟದಾರರಿಂದ (approved vendor) ಸಾಮಗ್ರಿಗಳ ಖರೀದಿ ಮಾಡಿರುವುದಕ್ಕೆ ದಾಖಲಾತಿಗಾಗಿ ಬಿಲ್ಲುಗಳನ್ನು / invoices ಗಳನ್ನು ಸಲ್ಲಿಸಬೇಕು. ನಿಗಮ ಕಛೇರಿಯ ಸುತ್ತೋಲೆ ಸಂಖ್ಯೆ BESCOM/BC-9/CGM (CA)/DGM(CA-3)/F-752/13-14/CYS-113 / 29.08.2013 ಪ್ರಕಾರ ಅರ್ಜಿದಾರರು ಪಾಲಿಮರ್ ವಿದ್ಯುತ್ ನಿರೋಧಕವನ್ನು ಮಾತ್ರ ಬಳಸಬೇಕು.
11. ಸ್ಥಾವರದ ಪವರ್ ಫ್ಯಾಕ್ಟರ್ 0.90 ಲ್ಯಾಂಗ್ ಗಿಂತ ಕಡಿಮೆಯಿಲ್ಲದೆ ನಿಗದಿತ ಸಾಮರ್ಥ್ಯವಿರುವ ಮತ್ತು ಅನುಮೋದನೆ ಪಡೆದಿರುವ ಕೆಪ್ಪಾಸಿಟರನ್ನು ಅಳವಡಿಸುವುದು.
12. ಮಾಪಕ ಸಾಧನ ಮತ್ತು ಸ್ವಿಚ್ ಗೇರ್‌ನ ನಕ್ಷೆಯ ಅನುಮೋದನೆಯನ್ನು ಮತ್ತು ತಪಾಸಣೆಯನ್ನು ಸಕ್ಷಮ ಪ್ರಾಧಿಕಾರದವರಿಂದ ಪಡೆಯುವುದು.
13. ಮುಂದೆ ಆಗುವ ಯಾವುದೇ ಭಾದ್ಯತೆಗಳಿಗೆ ಬೆವಿಕಂ ಜವಾಬ್ದಾರಿಯಾಗಿರುವುದಿಲ್ಲ.
14. ಕಾಮಗಾರಿಗಳಿಗೆ ಬಳಸಿದ ಸಾಮಗ್ರಿಗಳ ಗುಣಮಟ್ಟವು ಮತ್ತು ಕಾಮಗಾರಿಯ ಗುಣಮಟ್ಟವನ್ನು, ಬೆವಿಕಂ ರವರು ಮಾರ್ಗಗಳನ್ನು ಮತ್ತು ಸಾಮಗ್ರಿಗಳನ್ನು ತೆಗೆದುಕೊಂಡ ದಿನದಿಂದ ಒಂದು ವರ್ಷದ ಅವಧಿವರೆಗೂ ಖಾತರಿ ನೀಡಬೇಕು.
15. ಕೆ.ಇ.ಆರ್.ಸಿ ನಿಯಮದ ಪ್ರಕಾರ, ವಿದ್ಯುತ್ ಸಾಮಗ್ರಿಗಳಿಗೆ ಮತ್ತು ಮಾರ್ಗಗಳಿಗೆ ವಿದ್ಯುತ್ ಪರಿವೀಕ್ಷಕರವರಿಂದ ಚಾಲನೆಗೊಳ್ಳುವ ಮೊದಲೇ ಅನುಮೋದನೆ ಪಡೆಯಬೇಕು.
16. ಹಾಲಿ ಇರುವ ವ್ಯವಸ್ಥೆಯಲ್ಲಿ ಯಾವುದೇ ಬದಲಾವಣೆ ಆಗುವ ಸಂದರ್ಭದಲ್ಲಿ, ಸಂಬಂಧ ಪಟ್ಟ ಅಧಿಕಾರಿಗಳಿಂದ ಅನುಮೋದನೆ ಪಡೆದು ಅದರ ವೆಚ್ಚವನ್ನು ಅರ್ಜಿದಾರರೇ ಪಾವತಿಸಬೇಕು. IE ನಿಯಮದ ಪ್ರಕಾರ ವಿದ್ಯುತ್ ಮಾರ್ಗಗಳಿಗೆ ಸೂಕ್ತವಾದ ಭದ್ರತೆ ನಿಶಾನೆ ನಿರ್ವಹಣೆ ಮಾಡಬೇಕು.
17. ಹಾಲಿಯಿರುವ ಕೆಇಆರ್‌ಸಿ / ಸರಬರಾಜು ನಿಯಮಾವಳಿಗಳಿಗೆ ಮತ್ತು ಚಾಲ್ತಿಯಲ್ಲಿರುವ ತಿದ್ದುಪಡಿಗೆ ಭದ್ರವಾಗಿರಬೇಕು
18. ಮೇಲೆ ತಿಳಿಸಿರುವ ಹಣದ ಪಾವತಿಯನ್ನು 90 ದಿವಸಗಳೊಳಗಾಗಿ ಖಡ್ಗಾಯವಾಗಿ ಪಾವತಿ ಮಾಡಬೇಕು, ವಿಳಂಬವಾದಲ್ಲಿ ಹಾಗೂ ಮೇಲೆ ತಿಳಿಸಿರುವ ಷರತ್ತುಗಳನ್ನು ಉಲ್ಲಂಘಿಸಿದ್ದಲ್ಲಿ, ಕೆಇಆರ್‌ಸಿ ತಿದ್ದುಪಡಿ ಷರತ್ತು 4.03(ii) ಪ್ರಕಾರ ವಿದ್ಯುತ್ ಮಂಜೂರಾತಿಯನ್ನು ರದ್ದು ಪಡಿಸಲಾಗುವುದು.
19. ಭವಿಷ್ಯದಲ್ಲಿ, ಯಾವುದೇ ವ್ಯತ್ಯಾಸದ ಮೊತ್ತವು ಪಾವತಿಸಬೇಕಾದಲ್ಲಿ ಕೂಡಲೇ ಅದನ್ನು ಬೆವಿಕಂ/ಕವಿಪ್ರನಿನಿಗೆ ಪಾವತಿಸಬೇಕು.

ತಮ್ಮ ವಿಶ್ವಾಸಿ

(ಆನಂದ್ ಕುಮಾರ್ ಕೆ)

ಕಾರ್ಯನಿರ್ವಾಹಕ ಇಂಜಿನಿಯರ್(ವಿ)

ಬೆ.ವಿ.ಕಂ, ಚಿಕ್ಕಬಳ್ಳಾಪುರ ವಿಭಾಗ

- ಪ್ರತಿಯನ್ನು ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಇಂಜಿನಿಯರ್(ವಿ), ಬೆ.ವಿ.ಕಂ, ಗೌರಿಬಿದನೂರು ಉಪ ವಿಭಾಗ ರವರ ಮಾಹಿತಿಗಾಗಿ.
- ಪ್ರತಿಯನ್ನು ತಾ.ಸ-3, ತಾಂತ್ರಿಕ ಶಾಖೆ, ಬೆವಿಕಂ, ಚಿಕ್ಕಬಳ್ಳಾಪುರ.

ಬೆಂಗಳೂರು ವಿದ್ಯುತ್ ಸರಬರಾಜು ಕಂಪನಿ ನಿಯಮಿತ

(ಕರ್ನಾಟಕ ಸರ್ಕಾರದ ಸಂಪನ್ಮೂಲ ಸ್ವಾಮ್ಯ ಒಳಪಟ್ಟಿದೆ)

Estimate No: KPG-77

Date: 09.12.2022

Arranging Power supply to 250 kVA HT installation for Industry purpose in favour of M/s SULIT METALS & ALLOYS PVT LTD., Plot No: 19-P2, 2nd Phase KIADB, Kudumalakunte village, Gowribidanur Taluk in Vidurashwatha Section, Gowribidanur Sub-Division, Chikkaballapura. Under Self Execution Scheme.

SI No	Name of the Particulars	Material Cost				Labour Charges	
		Unit	Qty	Rate	Amount	Rate	Amount
1	DP Structure with 9 Mtrs RCC Poles of 145Kg WL	Set	2	21,369.00	42,738.00	4,114.00	8,228.00
2	Spiral Earth Electrode	Set	4	248.00	992.00	70.00	280.00
3	11 kV Horizontal cross arm with HT Single Top support, clamp, bolts, nuts and washers -MS	Set	2	668.00	1,336.00	122.00	244.00
4	11 KV, 5KN composite/Polymeric Pin Insulator (24mm Dia FP Rod)	No	9	221.00	1,989.00	-	-
5	11KV, 45 KN Polymeric Insulator	No	6	202.00	1,212.00	-	-
6	Rabbit ACSR	Mtrs	45	61.52	2,768.18	3.30	148.46
7	Conductor Accessories @ 3%				83.05		-
8	Alkathin Tube of 30 m coil	No	1		-	-	-
9	11kV Solid Core Type HG Fuse Unit	Set	1	1,032.00	1,032.00	178.00	178.00
10	GOS 200 A Single break	Set	2	9,125.00	18,250.00	805.00	1,610.00
11	11kV G.O.S. Mounting H-Frame set for 200A Single break	Set	2	4,134.00	8,268.00	242.00	484.00
12	Lightning Arrestors 9 kV	Set	1	1,736.00	1,736.00	90.00	90.00
13	U.G. Cable 3 x 95 Sq mm 11kV Class	Mtrs	40	1,115.62	44,624.60	45.28	1,811.36
14	Cable termination kit Out door / In door HS Type Suitable for 3 x 95 Sq.mm	Sets	4	3,966.00	15,864.00	1,965.00	7,860.00
15	Cable trench excavation, 1000x0.6x1=600, Ordinary soil	Cmtr	20	-	-	260.00	5,200.00
16	Refilling and consolidation	Cmtr	20	-	-	58.00	1,160.00
17	Cable covering tiles 250X125X40 mm or 125x125x40 mm	Nos	100	10.00	1,000.00	0.33	32.92
18	Artificial/Manufacture Sand	Cmtr	2	1,488.00	2,976.00	11.57	23.14
19	GI Pipe, 150 mm dia for drain crossing, cable raising etc.,	Mtr	12	1,528.00	36,672.00	58.00	696.00
20	Grounding for Cubical	No	3	1,733.00	5,199.00	725.00	2,175.00
21	Construction of plat-form for Erection of Metering Cubical	No	1	-	-	30,361.00	30,361.00

ಬೆಂಗಳೂರು ವಿದ್ಯುತ್ ಸರಬರಾಜು ಕಂಪನಿ ನಿಯಮಿತ

(ಕರ್ನಾಟಕ ಸರ್ಕಾರದ ಸಂಪನ್ಮೂಲ ಸಚಿವರು)

22	11kV HT Metering cubicle of different CT Ratio, Both side cable entry type with 3CT & 3PTs, With Transparent Cover TTB, with 30x8mm Cu Bus bars, Modem and 2 Nos of Meters for 3Ph 4 Wire Metering without Load Break Switch (HT Metering Box Fabricated out of 3mm MS Sheet duly epoxy powder coated)	No	1	2,44,780.00	2,44,780.00	1,726.00	1,726.00
23	Load Break Switches with Panel	No	1	73,632.00	73,632.00	-	-
Sub Total					5,05,152.00		62,308.00
Employees Cost @ 20% on Labour							12,461.60
Contingencies at 2 % on Total							11,349.20
Miscellaneous							729.00
Total Part A							5,92,000.00

Certificate :Certified that I have personally inspected the spot and prepared estimate as per current schedule of rates for most safe and economical way to excute the work.

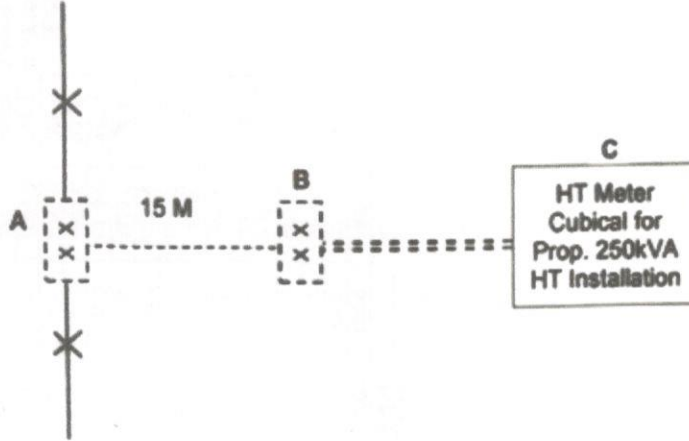

 Assistant Executive Engineer(Elec)
 BESCOM, C, O & M Sub Division,
 Gowribidanur


 Junior Engineer (Elec)
 BESCOM, Vidurashwatha Section

ಬೆಂಗಳೂರು ವಿದ್ಯುತ್ ಸರಬರಾಜು ಕಂಪನಿ ನಿಯಮಿತ

(ಕರ್ನಾಟಕದ ಸರ್ಕಾರದ ಸಂಪೂರ್ಣ ಸ್ವಾಮ್ಯದ ಒಳವಸ್ತು)

Sketch:



Report: This estimate has been prepared for arranging Power supply to 250 kVA HT installation for Industry purpose in favour of M/s SULIT METALS & ALLOYS PVT LTD., Plot No: 19-P2, 2nd Phase KIADB, Kudumalakunte village, Gowribidanur Taluk in Vidurashwatha Section, Gowribidanur Sub-Division, Chikkaballapura. Under Self Execution Scheme.

It is proposed to extend the HT line to a distance of 15 Mtrs from point 'A' to 'B'.

It is proposed to provide DP Structure at point 'A' & 'B'.

It is proposed to lay 3 x 95 Sq.mm XLPE UG cable (Double Run) from 'B' to 'C' to a distance of 20 Mtrs,

It is proposed to provide HT metering cubicle at point 'C' as shown in the sketch. The proposed load comes on F-6 Precot feeder emanating from Vidurashwatha MUSS.

All the necessary materials and labour provision are made in the estimate. Hence this estimate may kindly be sanctioned at earliest.



Assistant Executive Engineer(Elec)
BESCOM, C, O & M Sub Division,
Gowribidanur



Junior Engineer (Elec)
BESCOM, Vidurashwatha Section

VOLTAGE REGULATION & ANNUAL ENERGY LOSSES OF 11 KV FEEDERS.

NAME OF THE SUB STATION : Vidurashwatha
NAME OF THE FEEDER : F-6 Precot

1	2	3	4	5	6	7	8	9	10
0.80 V	0.25 V	0.30 V	0.30 V	0.04 V	0.30 V	0.30 V	0.30 V	0.60 V	0.20 V
100	63	100	100	100	63	63	25	63	25
11	12	13	14	15	16	17	18	19	
0.20 V	0.40 V	0.30 V	0.06 V	0.25 V	0.20 V	0.25 V	0.35 V	0.15 V	
25	125	100	100	25	100	25	63	25	
20	21	22	23	24	25	26	27	28	
0.25 V	0.20 V	0.40 V	0.25 V	0.12 V	0.14 V	0.06 V	0.30 V	0.20 V	
25	100	136	63	136	63	188	100	63	

Coyote	1	2	3	4	5	6	7	8	9	10
Rabbit	1	2	3	4	5	6	7	8	9	10
Weasel	1	2	3	4	5	6	7	8	9	10
Squirrel	1	2	3	4	5	6	7	8	9	10

Peak Current (Ip)	150 Amp
Annual Energy sent out on the feeder (Ae)	2791200 Units
Power factor	0.85
Diversity Factor (df)	0.773
df = $\frac{Ip}{(1.73 \times 11 \times Ip)}$	0.131
Load factor (lf)	0.040
lf = $\frac{Ae}{(1.73 \times 11 \times Ip \times 8760)}$	6.67 Kms
Loss load factor (llf)	2206 KVA
llf = $0.2 \times lf + 0.8 \times df$	
Total length of the feeder (lf)	
Total load on the feeder (lp)	
Losses = $(0.105 \times lf \times thvkm / 2 \times df \times 100)$	30689.68 Units
% Regulation = $(\frac{lp \times lf}{Ae}) \times 100$	7.03%

(Continued in the next page.....)

NAME OF THE SUB STATION : Vidurashwatha
NAME OF THE FEEDER : F-6 Precot

From Node (a)	To Node (b)	Length in KMs (c)	Conductor (d)	Cap. in KVA at To-Node (e)	Load at To-Node (f)	KVA-KM at To-Node (g)
1	2	0.60	Rabbit	100.0	2206.0	1323.6
2	3	0.25	Rabbit	63.0	2106.0	526.5
3	4	0.20	Rabbit	100.0	2043.0	408.6
4	5	0.20	Rabbit	150.0	1943.0	388.6
5	6	0.04	Rabbit	88.0	1793.0	71.7
6	7	0.30	Rabbit	63.0	1705.0	511.5
7	8	0.30	Rabbit	25.0	1642.0	492.6
8	9	0.50	Rabbit	63.0	1617.0	806.5
9	10	0.20	Rabbit	25.0	1554.0	310.8
10	11	0.20	Rabbit	25.0	1529.0	305.8
11	12	0.40	Rabbit	125.0	1504.0	601.6
12	13	0.30	Rabbit	100.0	1379.0	413.7
13	14	0.06	Rabbit	25.0	1279.0	76.7
14	15	0.25	Rabbit	163.0	1254.0	313.5
15	16	0.20	Rabbit	100.0	1091.0	218.2
16	17	0.25	Rabbit	25.0	991.0	247.8
17	18	0.35	Rabbit	63.0	966.0	338.1
18	19	0.15	Rabbit	25.0	903.0	135.5
19	20	0.25	Rabbit	25.0	878.0	219.5
20	21	0.20	Rabbit	100.0	853.0	170.6
21	22	0.40	Rabbit	138.0	753.0	301.2
22	23	0.25	Rabbit	63.0	615.0	153.8
23	24	0.12	Rabbit	138.0	552.0	66.2
24	25	0.14	Rabbit	63.0	414.0	58.0
25	26	0.06	Rabbit	188.0	351.0	21.1
26	27	0.30	Rabbit	100.0	163.0	48.9
27	28	0.20	Rabbit	63.0	63.0	12.6
TOTAL						8545.1

Voltage Regulation at tail end L_a, at last Node : 7.03%

Annual Energy Loss (KVA-KM Method) 38689.60 Units

K.P. Ganur
ಶಾಖಾಧಿಕಾರಿ
ವಿದ್ಯುತ್
ಜಿ.ಎ.ಒ.

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು (ವಿ)
ಬೆಂಗಳೂರು ವಿದ್ಯುತ್ ಸರಬರಾಜು ಕಂಪನಿ ನಿ.
ಗೌರಿಬಿದನೂರು ಉಪವಿಭಾಗ.



ಬೆಂಗಳೂರು ವಿದ್ಯುತ್ ಸರಬರಾಜು ಕಂಪನಿ ನಿಯಮಿತ

(ಕರ್ನಾಟಕದ ಸರ್ಕಾರದ ಸಂಪೂರ್ಣ ಸ್ವಾಮ್ಯಕ್ಕೆ ಒಳಪಟ್ಟಿದೆ)

22	11kV HT Metering cubicle of different CT Ratio, Both side cable entry type with 3CT & 3PTs, With Transparent Cover TTB, with 30x8mm Cu Bus bars, Modern and 2 Nos of Meters for 3Ph 4 Wire Metering without Load Break Switch (HT Metering Box Fabricated out of 3mm MS Sheet duly epoxy powder coated)	No	1	2,44,780.00	2,44,780.00	1,726.00	1,726.00
23	Load Break Switches with Panel	No	1	73,632.00	73,632.00	-	-
Sub Total					5,05,152.00		62,308.00
Employees Cost @ 20% on Labour							12,461.60
Contingencies at 2 % on Total							11,349.20
Miscellaneous							729.00
Total Part A							5,92,000.00

Certificate : Certified that I have personally inspected the spot and prepared estimate as per current schedule of rates for most safe and economical way to execute the work.

Assistant Executive Engineer(Elec)
BESCOM, C, O & M Sub Division,
Gowribidanur

Junior Engineer (Elec)
BESCOM, Vidurashwatha Section

Office of the Executive Engineer(Ele), BESCOM, Chikkaballapura Division

Sanctioned W.O No. SE 2022-23/3082

Estimate is Sanctioned on : 09-02-2023

Under SELF EXECUTION for Rs. : ₹ 5,92,000.00

(Rupees: Five Lakh Ninty Two Thousand Only)

Note:1) No work order is assigned for the work.

2) Materials shall not be drawn from the BESCOM Stores

3) After completion of work, Joint inventory as prescribed vide Chief control of Accounts circular No.AO/CYS-10/92-93/20-04-1992 shall be taken and asset accounted in the books of Company.

JET

ABE(O)

AO

Exe. Eng. Ele.

Particulars	Ammount	RT No:	Date
10% SC	59,200.00	1058	08-02-2023
M.I.C	10,000.00	1061	08-02-2023
SGST @9%	6,228.00	1059	08-02-2023
CGST @9%	6,228.00	1060	08-02-2023
ISD	5,12,500.00	1057	08-02-2023

BANGALORE ELECTRICITY SUPPLY COMPANY LIMITED

FEASIBILITY REPORT

1	M. U. S. S.	a) Name of the station	66/11 KV MUSS, Vidurashwatha
		b) Installed capacity	1 x 8 MVA + 1 x 20 MVA
		c) Station Peak Load	1068 Amps / 17.80MW
		d) Bank No.	Bank - 2
		e) Peak Load on Bank No.	788 Amps / 13.1MW
2	Feeder	a) Name of the feeder	F-6 Precot
		b) Peak Load	150 Amps / 2.2 MW
		c) CT Ratio	200 / 1 - 1
		d) Cable size	3 X 240 Sqmm
		e) conductor used	Rabbit ACSR
		e) HTVR at Tail End	7.03%
3	Transformer	a) Location	-
		b) Capacity	-
		c) Connected Load	-
		d) Peak Load (Tong Tester Reading)	-
		e) No. of Circuits	-
		f) No. of circuits proposed	-
		g) Load on each circuit	-
4	LT Secondories	a) Conductor used	-
		b) LTVR of tail end	-
5	Incase of Additional power supply	a) RR No.	-
		b) Date of service	-
		c) Security deposits held	-
		d) Additional Load required	-
		e) Arrears (if any)	-

KP Gound
ಅಧಿಕಾರಿ
ವಿರುದ್ಧ

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು (ವಿ)
ಬೆಂಗಳೂರು ನಿಗ್ರಹ ಸರ್ವೆಕ್ಷನ್ ಕಛೇರಿ

TAX INVOICE

SUBJECT TO BANGALORE JURISDICTION



POWERICA LIMITED	GSTIN : 29AAACP3812E1ZP	IEC No: 0389015806
31st KM,Bommanahalli Village, Tumkur Road, Nelamangala Taluk, Bengaluru, KARNATAKA 562123	State Code : 29	
FACTORY Phone No: 9611671123, 7304555190, 080-27724994/995/997 CIN No.U31100MH1984PLC032825	PAN No. AAACP3812E	
Customer PO.No. : SMA/002/23-24	INVOICE NO: 192413388	DATE: 19-AUG-23

DETAILS OF RECEIVER/BILLED TO:	DETAILS OF CONSIGNEE/SHIPPED TO:
SULIT METALS AND ALLOYS PVT LTD NO. 12, 2ND FLOOR, 100 FEET ROAD, J.P. NAGAR, 6TH PHASE, BENGALURU - 560078 India	SULIT METALS AND ALLOYS PVT LTD PLOT NO. 19-P2, SY NO 27 & 35, KUDUMALAKUNTE VILLAGE, GOWRIBIDANUR 2ND PHASE INDUSTRIAL AREA, KASABA HOBLI, CHIKKABALLAPUR -561208 India
QR CODE	
IRIN: 3435824af5ef0f51f3fee4a18e12df3924bd8df1d0c10929a0b9f0c62cf96f5	Invoice Type - B2B
GST NO: 29ABCCS9435P1ZG	GST NO: 29ABCCS9435P1ZG
PLACE OF SUPPLY: Karnataka	PAN NO: ABCCS9435P
	STATE CODE:- 29

Sl. No.	NAME OF THE PRODUCT/SERVICE (CUSTOMISED)	HSN /SAC	UOM	QTY	RATE	AMOUNT	TAXABLE AMOUNT	CGST Rate	CGST Amount	SGST/JGST Rate	SGST/JGST Amount	IGST Rate	IGST Amount	TOTAL
1	ELECTRIC GENERATING SET, 250 KVA (CUSTOMISED) DG SET SR. NO.: 1901038324 Engine SR. NO.: 84550513 Alternator SR. NO.: N23H310212 PANEL NO.:	85021200	NOS	1	1500000	1,500,000.00	1,500,000.00	9.00	135,000.00	9.00	135,000.00	0.00	0.00	1,770,000.00
	Total			1		1,500,000.00	1,500,000.00		135,000.00		135,000.00		0.00	1,770,000.00

DETAILS OF GST PAID ON ADVANCE														
Adv. Receipt Number	Adv. Receipt Amount	Adv. Date	Adv. Tax	Adv. Tax Amount	Total Amount Before Tax									
					CGST	1,500,000.00								
					SGST	135,000.00								
Total adv:					Tax Amount	270,000.00								
AMOUNT IN WORDS	Seventeen Lakhs Seventy Thousand Rupees ONLY				Total amount After Tax	1,770,000.00								

TRANSPORTATION MODE:	REPRESENTATIVE COLLECTION													
L.R NO:														
VEHICLE NOS:	KA 50-2988													
Note: 1 PKG.														



DARSHAN Y M
Digitally signed by DARSHAN Y M
Date: 2023.08.19 13:10:02 +05'30'

Authorised Signature
Interest @ 24% per annum will be charged if this bill is not paid within 15 days