




ಬೆಂಗಳೂರು ವಿದ್ಯುತ್ ಸರಬರಾಜು ಕಂಪನಿ ನಿಯಮಿತ

(ಕರ್ನಾಟಕ ಸರ್ಕಾರ ಸಂಪೂರ್ಣ ಸ್ವಾಮ್ಯ ಒಳಪಟ್ಟಿದೆ)

Sketch:

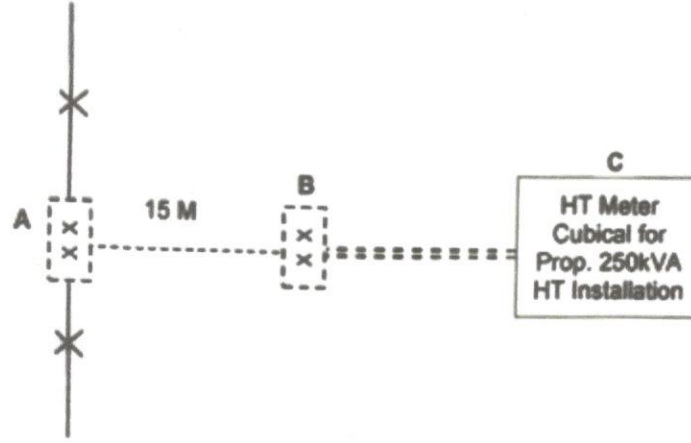

Report: This estimate has been prepared for arranging Power supply to 250 kVA HT installation for Industry purpose in favour of M/s SULIT METALS & ALLOYS PVT LTD., Plot No: 19-P2, 2nd Phase KIADB, Kudumalakunte village, Gowribidanur Taluk in Vidurashwatha Section, Gowribidanur Sub-Division, Chikkaballapura. Under Self Execution Scheme.

It is proposed to extend the HT line to a distance of 15 Mtrs from point 'A' to 'B'.

It is proposed to provide DP Structure at point 'A' & 'B'.

It is proposed to lay 3 x 95 Sq.mm XLPE UG cable (Double Run) from 'B' to 'C' to a distance of 20 Mtrs,

It is proposed to provide HT metering cubicle at point 'C' as shown in the sketch. The proposed load comes on F-6 Precot feeder emanating from Vidurashwatha MUSS.

All the necessary materials and labour provision are made in the estimate. Hence this estimate may kindly be sanctioned at earliest.

Assistant Executive Engineer(Elec)
BESCOM, C, O & M Sub Division,
Gowribidanur


Junior Engineer (Elec)
BESCOM, Vidurashwatha Section



VIGNESH VIDYUTH CONTROLS

Manufacturers of :

Power Distribution Transformers & Special Type Transformers



REF NO: VVC/GC/2907/22-23

Date: 05.01.2023

GUARANTEE CERTIFICATE

CUSTOMER NAME: M/S. SULIT METALS & ALLOYS

ADDRESS : Plot.No, 19-P2, Gowribidanooru Industrial Area, 2nd Kudamala Kunte,
Ksaba Hobli, Gowribidanooru -561208

PRODUCT : 500KVA, 11000 / 433VOLTS 11KV CLASS EEL-2, 5STAR
RATING ALLUMINIUM WOUND INDOOR TYPE DISTRIBUTION TRANSFORMER


SL.NOS :- VIDYUTH B5S - 4461

THIS EQUIPMENT IS GUARANTEED OF SATISFACTORY PERFORMANCE FOR A PERIOD OF 12 MONTHS FROM THE DATE OF COMMISSIONING OR 18 MONTHS FROM THE DATE OF DISPATCH, WHICHEVER IS EARLIER. THE GUARANTEE DOES NOT STAND AGAINST ANY DAMAGES, IF

- DAMAGES CAUSED DUE TO IMPROPER MAINTENANCE.
- ANY MODIFICATION OR REPAIR CARRIED OUT PERSONALLY OTHER THAN THE AUTHORIZED PERSON.
- DAMAGES CAUSED DUE TO IMPROPER OR CARELESS HANDLING.
- DAMAGES CAUSED DUE TO NATURAL CALAMITIES.
- DAMAGES CAUSED DUE TO OVERLOAD OF TRANSFORMER (MAXIMUM LOAD SHOULD BE 80% OF RATED LOAD)

WE AGREE TO REPAIR/REPLACE THE EQUIPMENT FOR FREE OF COST IF ANY DAMAGES OCCURING DUE TO MANUFACTURING DEFECT.

For Vignesh Vidyuth Controls


(Authorized Signatory)





POWER BACKUP 250KV